

AIR-OPERATED DOUBLE DIAPHRAGM PUMPS



Meclube Model A110

Made of ALUMINIUM

Compression ratio: 1:1
 Max flow-rate: 110 l/min
 Fluid connections: 3/4" BSP

Technical data

Fluid connections: 3/4" BSP
 Air connection: 3/8" BSP
 Max flow-rate: 100 l/min
 Max air pressure: 8 bar
 Max delivery head: 80 m
 Max Suction Lift Dry: 5,0 m
 Max Suction Lift Wet: 9,8 m
 Max Solid passing: 4 mm
 Noise level: 72 dB
 Displacement per cycle: 200 cm³
 Max Viscosity: 25000 cps




EX II 3/3 GD h IIB T4 135°C ATEX zone2

ARTICLE	CASING	DIAPHRAGM	BALLS	GASKET	FLUIDS
028-A110-AB1	ALUMINIUM	HYTREL	SS AISI 316	NBR	oil-exhausted oil-diesel fuel
028-A110-AB2	ALUMINIUM	HYTREL+PTFE	PTFE	VITON	water-anti-freeze-windscreen
028-A110-AB3	ALUMINIUM	HYTREL+PTFE	PTFE	PTFE	aggressive fluids (acids and basics)
028-A110-AB4	ALUMINIUM	SANTOPRENE	EPDM	EPDM	abrasive liquids - alkaline/basic

Dimensions

A110

A (mm) 265
 B (mm) 178
 C (mm) 245
 Gross weight kg 6,0
 MAX Temperature -20°C + 95°C

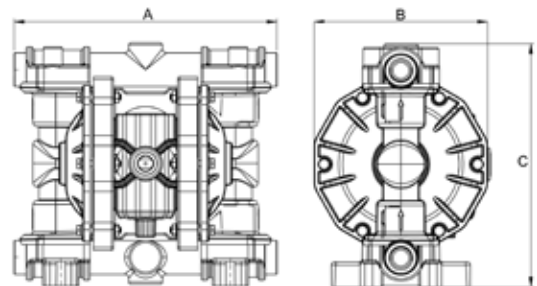

Showroom



Tools & Equipment
 Way No 7721, Road No 5, Mabela Industrial Area, Muscat, Oman.
Mabela Showroom: 9396 6865
 Sohar - 9133 2946, Salalah - 7193 6778
 Nizwa - 7158 3574, Jalan Bani Bu Ali - 9988 2973
 9983 3239, 9320 0399, 9897 5620, 9381 9668,
 9915 9088, 91788 597, 91742 867, 9386 2790
 2246 4851 | Toll Free: 8000 4321
 www.opalte.com | Opal Tools & Equipment - Oman | opaltoolsandequipment

Head Office



Opal Marketing & Industry LLC
 P.O. Box - 273, Ruwi, Postal Code: 112,
 Muscat, Oman.
 2447 8568, 2447 9986 | Fax: 2447 8566
 www.opalgcc.com